

## KT-LED8BR30-8XX /G2

### 65W REPLACEMENT LAMP

#### DESCRIPTION

8W BR30 Lamp | 2700–5000K | > 80 CRI | Standard Flood



**LAMP TYPE:** BR30

**BASE TYPE:** E26 (Medium)

**WATTAGE:** 8W

**COLOR TEMPERATURE:** 2700–5000K

**COLOR RENDERING INDEX (CRI):** > 80

**WARRANTY:** 3 Years

**RATED LIFE:** L70 (15,000 Hours)

#### TYPICAL APPLICATIONS

- Recessed downlights
- Track lighting
- Surface-mount ceiling fixtures

#### PRODUCT FEATURES

- Energy efficient, 80%+ energy savings over legacy equivalents
- Lower heat generation than legacy equivalents
- ANSI compliant construction ensures fitment for intended applications
- Durable plastic housing lowers the risk for breakage
- Smooth, diffused lens for comfortable glare-free performance
- Long life minimizes replacement and maintenance costs
- Smooth, uniform dimming to 10%
- Suitable for use in damp locations
- Suitable for use in enclosed fixtures
- PF > 0.8
- UL 1993 Listed, meets CSA C22.2 No. 1993 standards
- Operating temperature range –13°F/–25°C to 104°F/40°C
- Complies with Part 15 of FCC


#### PERFORMANCE SPECIFICATIONS

| Keystone Catalog Number | Rated Lamp Wattage | Legacy Equivalent Wattage | Color Temp | Lumens | Efficacy | Input Voltage | CRI | Base Type | Dimmable | Beam Angle |
|-------------------------|--------------------|---------------------------|------------|--------|----------|---------------|-----|-----------|----------|------------|
| KT-LED8BR30-827 /G2     | 8W                 | 65W halogen               | 2700K      | 650    | 81 lm/W  | 120V          | ≥80 | E26       | Yes      | 100°       |
| KT-LED8BR30-830 /G2     | 8W                 | 65W halogen               | 3000K      | 650    | 81 lm/W  | 120V          | ≥80 | E26       | Yes      | 100°       |
| KT-LED8BR30-835 /G2     | 8W                 | 65W halogen               | 3500K      | 650    | 81 lm/W  | 120V          | ≥80 | E26       | Yes      | 100°       |
| KT-LED8BR30-840 /G2     | 8W                 | 65W halogen               | 4000K      | 650    | 81 lm/W  | 120V          | ≥80 | E26       | Yes      | 100°       |
| KT-LED8BR30-850 /G2     | 8W                 | 65W halogen               | 5000K      | 650    | 81 lm/W  | 120V          | ≥80 | E26       | Yes      | 100°       |

## KT-LED8BR30-8XX /G2

### REPLACEMENT LAMP

#### PHYSICAL SPECIFICATIONS

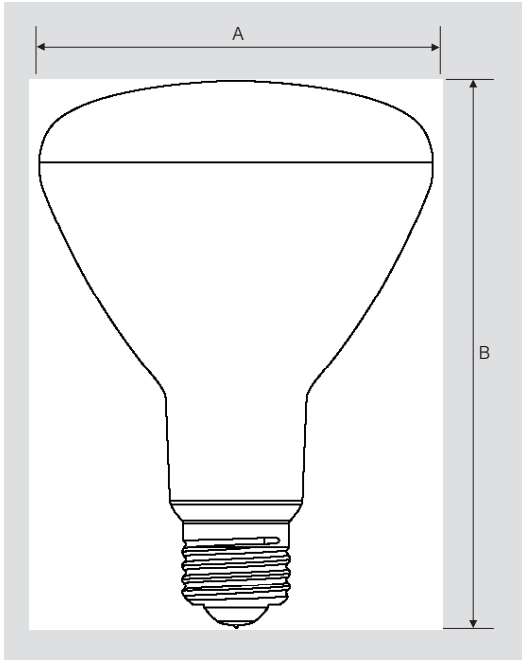

#### LAMP DIMENSIONS

|                     |       |
|---------------------|-------|
| <b>A (Diameter)</b> | 3.73" |
| <b>B (Length)</b>   | 5.21" |

**BASE TYPE:** E26 (Medium)

#### PACKAGING

|                          |                          |
|--------------------------|--------------------------|
| <b>Carton Quantity</b>   | 24 pcs                   |
| <b>Carton Dimensions</b> | 15.91" × 12.05" × 12.17" |
| <b>Carton Weight</b>     | 3.65 lbs                 |

#### ORDERING INFORMATION

| ORDER CODE          | EASY CODE | UPC          |
|---------------------|-----------|--------------|
| KT-LED8BR30-827 /G2 | KMI-36    | 843654130361 |
| KT-LED8BR30-830 /G2 | DBK-54    | 843654130378 |
| KT-LED8BR30-835 /G2 | XHH-72    | 843654130385 |
| KT-LED8BR30-840 /G2 | HYV-13    | 843654130392 |
| KT-LED8BR30-850 /G2 | SVB-16    | 843654130408 |

#### CATALOG NUMBER BREAKDOWN

## KT-LED8BR30-8XX /G2

**1** **2** **3** **4** **5** **6** **7**

- 1** Keystone Technologies
- 2** LED Lamp
- 3** Wattage
- 4** Lamp Shape
- 5** 80 CRI
- 6** CCT
- 7** 2nd Generation