

SUBMITTAL DATA SHEET

Product Name: Wired Controller
Model Number: KJR-120N(X6W)



Wired Controller

Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Approval: _____
Date: _____
Construction: _____
Unit #: _____
Drawing #: _____


SPECS

Code	17317100009536	
Model	KJR-120N(X6W)	
Power supply	V	12 VDC
Product size	inch	4-3/4 x 4-3/4 x 7/8
	mm	120 x 120 x 20.6
Net weight	lbs	0.46
	kg	0.21
Ambient temperature	°F	32-110
	°C	0-43
Ambient humidity	RH	40%-90%
Material	Front panel	PC/ABS
	Back cover	PC/ABS




Dimension


unit: inch (mm)

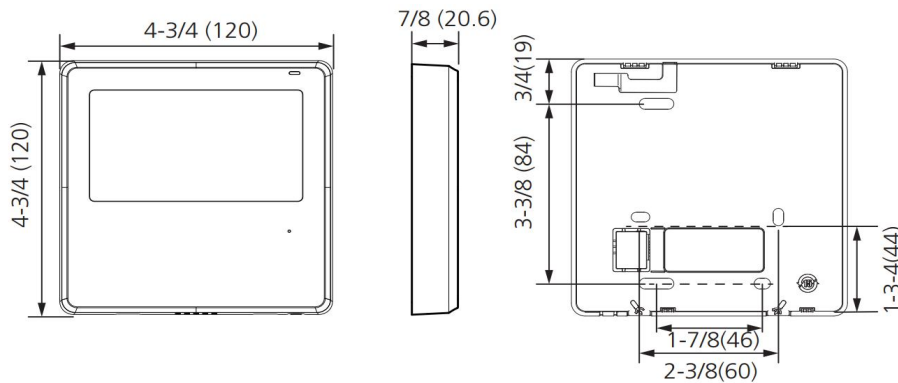

Display

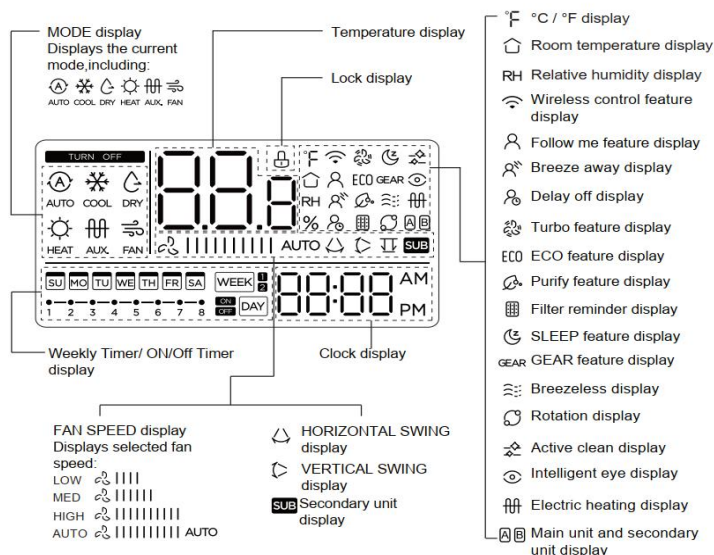


Button

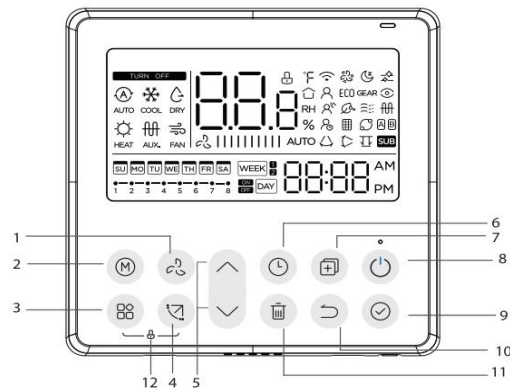

- | | |
|--------------------|-------------------------|
| 1 FAN SPEED button | 7 COPY button |
| 2 MODE button | 8 POWER button |
| 3 FUNC. button | 9 CONFIRM button |
| 4 SWING button | 10 BACK button |
| 5 ADJUST button | 11 DAY OFF/DELAY button |
| 6 TIMER button | 12 CHILD LOCK button |

Feature and function



Feature:

- LCD display.
- Malfunction code display: it can display the error code, helpful for service.
- 4-way wire layout design, no raised part at backside, more convenient to place the wires and install the device.
- Room temperature display.
- Weekly Timer.

Function:

- | | |
|---|---|
| <ul style="list-style-type: none"> • Mode: Choose Auto-Cool-Dry-Heat-Fan • Fan speed: Auto/Low/Med/High speed • Swing (on some models) • Timer ON/OFF • Temp setting • Weekly timer • Follow me • Turbo • 24-hour System • 12-hour System | <ul style="list-style-type: none"> • Auto-restart • Individual louver control (on some models) • Automatic airflow test • Rotation & Back-up • Dual Control • Group Control • Child Lock • LCD display • Clock |
|---|---|

Compatibility chart

7 day programmable wired Controller: KJR-120N(X6W)

EP	AG	AB	AF	Console	1-way cassette	4-way cassette
Yes	Yes	Yes	No	Yes	Yes	Yes
Ceiling&Floor	Slim duct	2nd Gen. AHU	3rd Gen. AHU	Wall Mounted AHU	Pancake	A-Coil
Yes	Yes	Yes	Yes	Yes	Yes	No